

MONO CRYSTALLINE - SHINGLED CELL TECHNOLOGY

400 / 405 / 410 / 415 / 420 / 425 / 430 Watts

Puma Series



Superior Performance and Reliability

Shingled technology eliminates traditional ribbon connection with shingles connected in series. By removing the soldered ribbons, the active area of the module is improved and thermal stresses are reduced - resulting in exceptional efficiency and reliability over standard interconnections.

Key Benefits

	Higher yield per surface area		Low Pmax Temperature Coefficient
	Higher yield in hot climate		25 Years Limited Product Warranty
	Low LCOE		Low Resistive Losses



Outstanding performance under extreme heat as well as low intensity solar radiation



Significantly low Pmax thermal coefficient



Positive Tolerance




100 % electro-luminescence tested

Tests, Certifications and Warranties

Standard Tests	IEC 61215, IEC 61730
Factory Quality Tests	ISO 9001: 2015, ISO 14001: 2015
Certifications	Conformity to CE, PV CYCLE
Insurance	Third party liability insurance provided by Liberty Mutual
Wind and Snow Loads Testing	Module certified to withstand extreme wind (2400 Pascal) and snow loads (5400 Pascal)
Withstanding Hail	Maximum Diameter of 25 mm with impact speed of 23 m/s
Power Tolerance	Guaranteed +0/+5W (STC condition)
Warranties	• 25-year limited product warranty • 15-year manufacturer warranty on 91.84% of the nominal performance • 25-year transferable linear power output warranty

Linear Performance Warranty

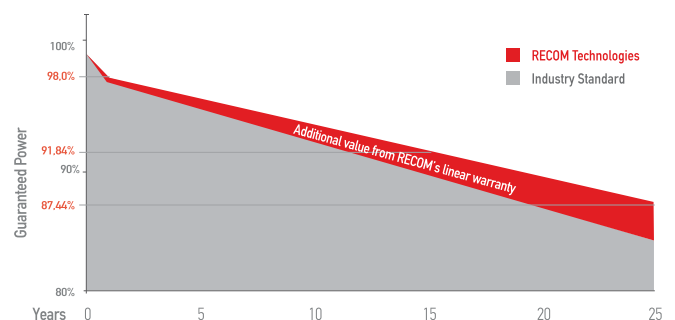

First Year Output	≥ 98.0%	2-25 Year Decline	≤ 0.44%	25 Year Output	≥ 87.44%
-------------------	---------	-------------------	---------	----------------	----------

Puma

MONO CRYSTALLINE - SHINGLED CELL TECHNOLOGY

RCM-xxx-SMD2 (xxx=400-430)

Electrical Characteristics

POWER CLASS ⁽¹⁾			400		405		410		415		420		425		430	
Testing Condition			STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum Power	Pmax	[Wp]	400	301	405	305	410	309	415	312	420	316	425	320	430	324
Maximum Power Voltage	Vmp	[V]	34,2	32,6	34,3	32,7	34,4	32,8	34,4	32,8	34,5	32,9	34,6	33,0	34,7	33,1
Maximum Power Current	Imp	[A]	11,71	9,24	11,82	9,33	11,93	9,41	12,08	9,53	12,19	9,62	12,30	9,70	12,40	9,79
Open Circuit Voltage	Voc	[V]	41,2	39,3	41,3	39,4	41,4	39,5	41,5	39,6	41,6	39,7	41,7	39,8	41,8	39,8
Short Circuit Current	Isc	[A]	12,41	10,00	12,53	10,09	12,65	10,19	12,80	10,31	12,92	10,41	13,03	10,50	13,05	10,51
Module Efficiency	Eff	[%]	20,1		20,4		20,6		20,9		21,1		21,4		21,7	
Maximum Series Fuse	IR	[A]	25													
Maximum System Voltage	Vsys	[V]	1.500 VDC (IEC)													

(1) Measurement Tolerances: P_{max} (± 3%), I_{sc} & V_{oc} (± 3%) - Power Classification 0/+5W


(2) STC (Standard Testing Condition): Irradiance 1000W/m², Cell Temperature 25°C, AM 1.5

(3) NMOT (Nominal Operating Module Temperature): Irradiance 800W/m², NMOT, Ambient Temperature 20°C, AM 1.5, Wind Speed 1m/s

Mechanical Data

Dimensions	1812mm x 1096mm x 30mm
Weight	20.8 Kg
Cell Type	PERC Mono-210 x 30mm - 305 pcs - G12
Front Glass	3.2mm Tempered and low iron glass + ARC
Backsheet	Anti-aging film (White)
Frame	Anodized Aluminium Alloy (Silver)
Junction Box	IP68 - 2 bypass diodes
Connector	MC4 compatible
Cable	4.0mm ² - V=(+) 300mm (-) 1000mm; H=(+) 220mm (-) 180mm or can be customized

Dimensions

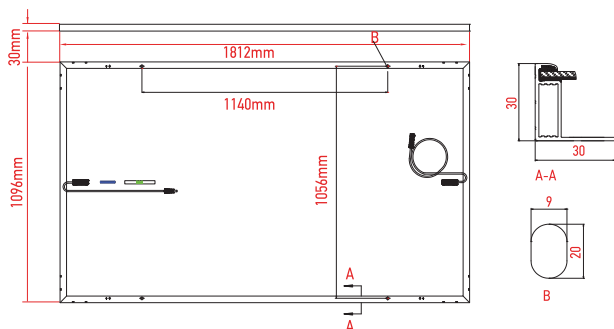


RECOM assumes no liability or responsibility for any typographical error, layout error, misinformation, any other error, omission, contained herein.

www.recom-tech.com

I-V Curve

The module relative power loss at low light irradiance of 200W/m² is less than 3%.

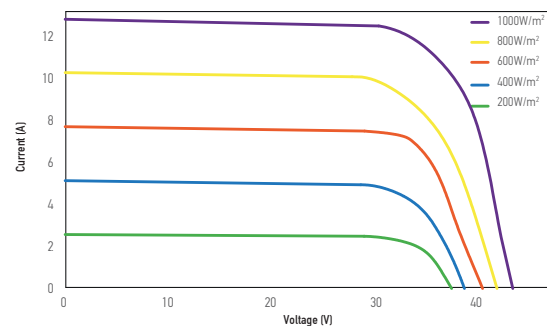

Temperature Characteristics

P _{max} Temperature Coefficient	-0.34% / °C
V _{oc} Temperature Coefficient	-0.27% / °C
I _{sc} Temperature Coefficient	+0.04% / °C
Operating Temperature	-40~+85 °C
(NMOT) Nominal Module Operating Temperature	42.3 ± 2 °C

Packing Configuration

Container	40'HC
Pieces per Pallet	36 / 30
Pallets per Container	24 + 2
Pieces per Container	(36 + 36) x 12 + (30 + 30) = 924 pcs

The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to on-going innovation, research and product enhancement, RECOM Technologies reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein. Please read the safety and installation instructions before using the modules.