



Honor Solar

HY-M6/120



HY-M6/120H

Monocrystalline Module
360-380W

Cell Type



9BB (166mm)

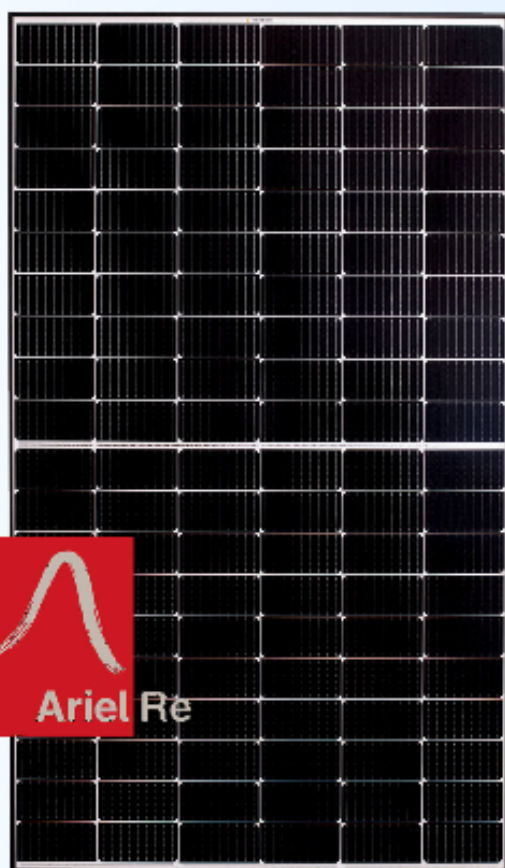

380W

Maximum Power Output

20.9%

Maximum Module Efficiency

0~+5W

Power Output Guarantee

Insurance

Manufacturer Corporate Insurance by Ariel Re



Ideal choice for large scale ground installation



Selected encapsulating material and stringent production process control ensure the product is highly PID resistant and snail trails free



Special cutting and soldering technology leads to low hotspot risk



Sand blowing test, salt mist test and ammonia test passed to endure harsh environments



Optimized system performance due to module level current sorting




Highly transparent self-cleaning glass brings additional yield and easy maintenance

Delivers Reliable Performance Over Time

- manufacturer of crystalline silicon photovoltaic modules
- Fully automatic facility and world-class technology
- Rigorous quality control to meet the highest standard. ISO9001:2015, ISO14001:2015 and OHSAS: 18001 2007
- Tested for harsh environments [salt mist, ammonia corrosion and sand blowing test: ILC61701, ILC62716, DIN LN 80068-2-68]
- Long term reliability tests
- 2x100% EL inspection ensuring defect free modules

Linear Performance Warranty

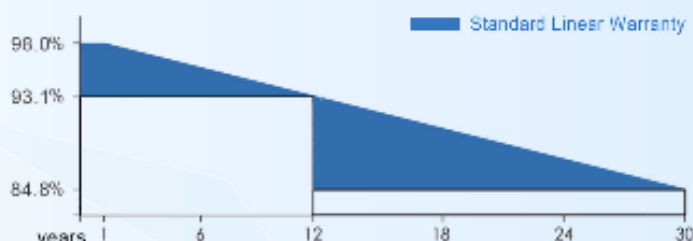

* Please refer to standard warranty for details

Product Certification



CREATE · THE FUTURE

HY-M6/120 HY-M6/120H

Monocrystalline Module 360-380W

Electrical Specification (STC*)

	Pmax(W)	360	365	370	375	380
Maximum Power	Pmax(W)	360	365	370	375	380
Maximum Power Voltage	Vmp(V)	33.74	34.09	34.46	34.83	35.20
Maximum Power Current	Imp(A)	10.67	10.71	10.74	10.78	10.82
Open Circuit Voltage	Voc(V)	40.39	40.67	40.95	41.23	41.51
Short Circuit Current	Isc(A)	11.13	11.18	11.18	11.20	11.22
Module Efficiency	(%)	19.7	20.0	20.3	20.6	20.9
Power Output Tolerance	(W)			0~+5		

* Irradiance 1000W/m², Module Temperature 25°C, Air Mass 1.5

Electrical Specification (NOCT*)

	Pmax(W)	266.75	270.92	274.23	277.53	279.94
Maximum Power	Pmax(W)	266.75	270.92	274.23	277.53	279.94
Maximum Power Voltage	Vmp(V)	31.12	31.35	31.48	31.61	31.74
Maximum Power Current	Imp(A)	8.57	8.64	8.71	8.78	8.85
Open Circuit Voltage	Voc(V)	38.20	38.40	38.60	38.80	38.90
Short Circuit Current	Isc(A)	9.03	9.09	9.15	9.21	9.27

* Irradiance 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s

Mechanical Data

Number of Cells	120 Cells (6x20)
Dimensions of Module L*W*H(mm)	1755x1038x35mm (69.09x40.86x1.38 inches)
Weight(kg)	20.6 kg
Front side Glass	High transparency solar glass 3.2mm(0.13 inches)
Backsheet	White
Frame	Black, anodized aluminium alloy
J-Box	IP68 Rated
Cable	4.0mm ² (0.008 inches ²), 300mm(11.8 inches)
Number of diodes	3
Wind/Snow Load	2400Pa/5400Pa*
Connector	MC Compatible

* For more details please check the installation manual

Temperature Ratings

Nominal Operating Cell Temperature (NOCT)	44±2°C
Temperature Coefficient of Isc	+0.06%/°C
Temperature Coefficient of Voc	-0.30%/°C
Temperature Coefficient of Pmax	-0.39%/°C

Maximum Ratings

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC-(H)
Max Series Fuse Rating	15A


Packaging Configuration

Module per box	31 pieces
Module per 40' HQ container	871pieces


Optional

Connector	MC Original
-----------	-------------


Module Dimension

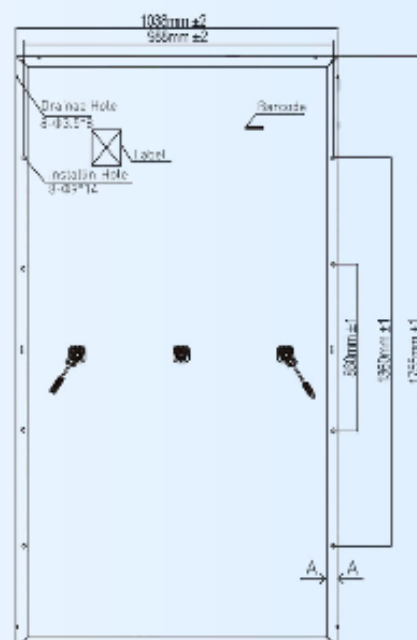

Back View



I-V Curve at Different Temperature (365W)

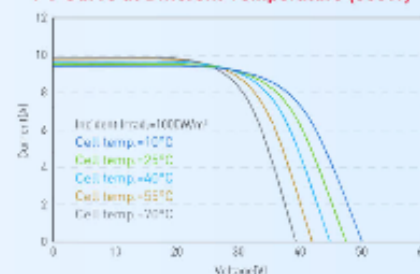

I-V/P-V Curve at Different Irradiation (365W)

