

ANKER SOLIX

LIVE IN POWER



Anker SOLIX Smart Meter Gen 2



PN	AE1X0	
SKU	AE1X0310	AE1X0311
Product Name	Anker SOLIX Smart Meter Gen 2 (Single-Phase)	Anker SOLIX Smart Meter Gen 2 (Three-Phase)
Applicability	Anker SOLIX XE AC Anker SOLIX Solarbank Max AC Anker SOLIX Solarbank 4 E5000 Pro	
Product Spec		
Voltage	230 Va.c.	3~230/400 Va.c.
Frequency	50 / 60 Hz	
Accuracy	±1 %	
Max Measurement per Channel	120 A	
Compatible CT	63 A CT(ø 10 mm) 120 A CT(ø 16 mm)	
Communication	RS485; Bluetooth; Wi-Fi (2.4G)	
Operating Temperature	-25°C to 55°C	
Max. Altitude	2,000 m	
Operating Humidity (RH)	5% to 95%	
Power Consumption	< 2 W	
Conductor Stripped Length	9 mm	
Conductor Cross Section	0.5 to 2.5 mm ²	
Mounting	DIN Rail 35 mm	
Ingress Protection	IP20 (Indoors Only)	
Warranty	2 Years	
Transportation		
Product Weight	80 g	85 g
Packaging Weight	370 g	450 g
Product Dimensions	105 × 66.7 × 19 mm	105 × 66.7 × 19 mm
Packaging Dimensions	154 × 133 × 69 mm	154 × 133 × 69 mm

Note: The parameters are for the current version and are subject to change upon final release.

Anker SOLIX CT Cable Assembly



	PN	AE1X0			
	SKU	AE1X0310-80	AE1X0310-81	AE1X0311-80	AE1X0311-81
	Product Name	Anker SOLIX Single CT Cable Assembly (63A)	Anker SOLIX Single CT Cable Assembly (120A)	Anker SOLIX Triple CT Cable Assembly (63A)	Anker SOLIX Triple CT Cable Assembly (120A)
	Applicability	Anker SOLIX Smart Meter Gen 2			
	Product Spec				
	Max Measurement	63 A	120 A	63 A	120 A
	Cable Length	1 m	1 m	1 m	1 m
	Transportation				
	Product Weight	60 g	96 g	165 g	290 g
	Packaging Weight	91 g	117 g	196 g	311 g
Packaging Dimensions	94 × 86 × 50 mm	94 × 86 × 50 mm	111 × 120 × 49 mm	111 × 120 × 49 mm	

Note: The parameters are for the current version and are subject to change upon final release.

Anker SOLIX Smart Plug Gen 2




PN	A17X8
SKU	A17X8312
Product Name	Anker SOLIX Smart Plug Gen 2
Applicability	Solarbank 2~4 series Anker SOLIX Solarbank Max AC Anker SOLIX XE AC
Product Spec	
Voltage	220V AC to 240V AC, 50/ 60 Hz
Accuracy	±1%
Max Measurement	16A
Supported Power	3680W
Communication	Bluetooth®; Wi-Fi (2.4G)
Operating temperature	-20°C to 40°C
Power consumption	<2W
Ingress Protection	IP 20
Warranty	2 Years
Transportation	
Product Weight	90 g
Packaging Weight	110 g
Product Dimensions	50 × 50 × 83 mm
Packaging Dimensions	52 × 52 × 85 mm

Note: The parameters are for the current version and are subject to change upon final release.

AC Cable with Wieland Plug (15 m)

ANKER SOLIX

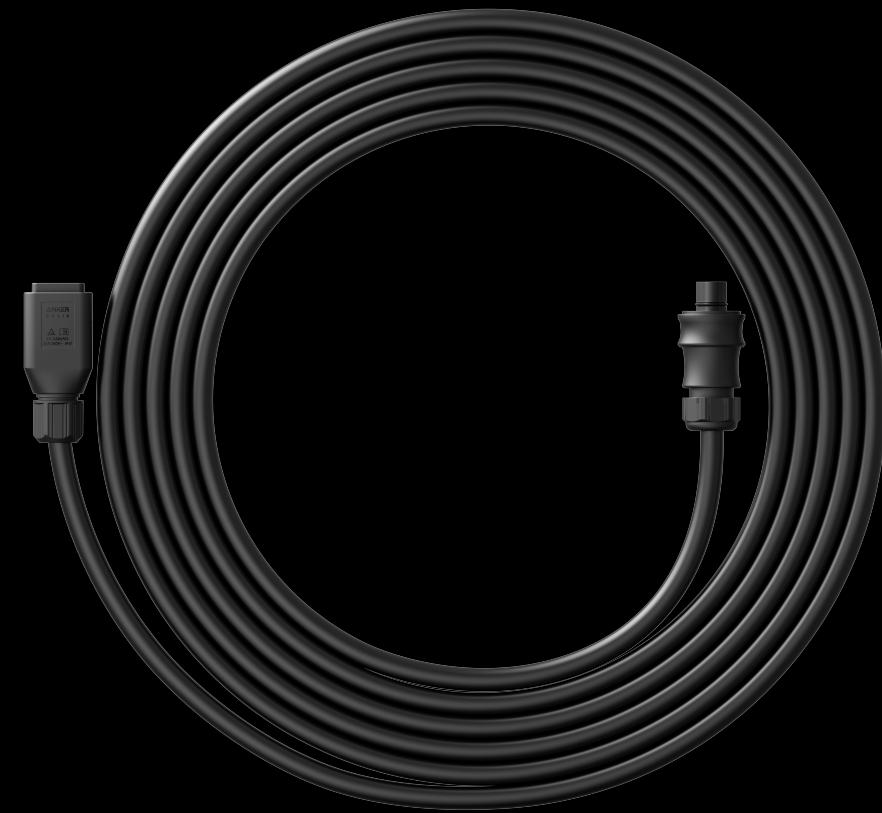

SKU	A17E23Z1-94
Product Name	Wieland Adapter Cable Panel Kit (15 m)
Applicability	Anker SOLIX Solarbank Max AC Anker SOLIX Solarbank 4 E5000 Pro
Product Description	Wieland plug AC cable (15 meters) with 16A/3680W capacity. Provides fixed plug connections to comply with local electrical safety standards.
Product Spec	
Rated Voltage	230 V
Rated Current	16 A
Rated Power	3,680 W
Number of Poles	3
Length	15 m
Warranty	1 Year
Transportation	
Product Weight	3.69 kg
Packaging Weight	3.79 kg
Packaging Dimensions	325 × 105 × 309 mm

Note: The parameters are for the current version and are subject to change upon final release.

AC Cable with Wieland Plug (5 m)

ANKER SOLIX

	SKU	AE1033Z1-81
	Product Name	Wieland Adapter Cable Panel Kit (5 m)
	Applicability	Anker SOLIX Solarbank Max AC Anker SOLIX Solarbank 4 E5000 Pro
	Product Description	Wieland plug AC cable (5 meters) with 16A/3680W capacity. Provides fixed plug connections to comply with local electrical safety standards.
	Product Spec	
	Rated Voltage	230 V
	Rated Current	16 A
	Rated Power	3,680 W
	Number of Poles	3
	Length	5 m
Warranty	1 Year	
Transportation		
Product Weight	1.23 kg	
Packaging Weight	1.33 kg	
Packaging Dimensions	294 × 78 × 262 mm	

Note: The parameters are for the current version and are subject to change upon final release.

Wieland Socket Panel and Female Connector



PN	A17E2
SKU	A17E23Z1-95
Product Name	Wieland Socket Panel and Female Connector
Applicability	Anker SOLIX Solarbank Max AC Anker SOLIX Solarbank 4 E5000 Pro
Product Description	Complete Wieland socket panel and female connector kit rated at 20A, designed to work seamlessly with Wieland plug cables. Ensures maximum safety and regulatory compliance while enabling fixed connections that meet strict electrical codes and standards.
Product Spec	
Rated Voltage	250 V
Rated Current	20 A
Number of Poles	3
What's in the box	1. Wieland Socket Panel*1 2. Female Connector*1 3. QSG
Warranty	1 Year
Transportation	
Product Weight	232 g
Packaging Weight	282 g
Packaging Dimensions	111 × 48 × 121 mm

Note: The parameters are for the current version and are subject to change upon final release.

AC Cable with Schuko Plug (15 m)

ANKER SOLIX

	PN	A17E2
	SKU	A17E23Z1-96
	Product Name	AC Cable with Schuko Plug (15 m)
	Applicability	Anker SOLIX Solarbank Max AC Anker SOLIX Solarbank 4 E5000 Pro
	Product Description	Long-reach Schuko AC cable (15 meters) for extended distance installations. 16A/3680W heavy-duty construction supports reliable power transmission over longer cable runs.
	Product Spec	
	Rated Voltage	230 V
	Rated Current	16 A
	Rated Power	3680 W
	Length	15 m
Warrenty	1 Year	
Transportation		
Product Weight	3.69 kg	
Packaging Weight	3.79 kg	
Packaging Dimensions	325 × 105 × 309mm	

Note: The parameters are for the current version and are subject to change upon final release.

AC Connector (Hardwiring)




PN	AE103
SKU	AE1033Z1-82
Product name	AC Connector (Hardwiring)
Applicability	Anker SOLIX XE AC Anker SOLIX Solarbank Max AC Anker SOLIX Solarbank 4 E5000 Pro
Product Description	Screwless-designed AC connector enables electricians to rapidly install three-pole cables from the distribution box to the on-grid port.
Product Spec	
Applicable Conductor Type	Flexible Wire(recomanded) / Solid Wire
Cable Outer Diameter (O.D.) Range	10-14 mm
Number of poles	3
Warrenty	1 Year
Transportation	
Product Weight	62 g
Packaging Weight	112 g
Packaging Dimensions	52.5 × 52.5 × 93 mm

Note: The parameters are for the current version and are subject to change upon final release.

Mounting Base



	PN	A17E2
	SKU	A17E23Z1-90
	Product name	Mounting Base
	Applicability	Anker SOLIX XE AC Anker SOLIX Solarbank Max AC
	Product Description	Essential mounting solution that elevates your energy storage system for moisture protection and ensures perfect ground leveling. Designed for optimal stability and long-term performance in various installation environments.
	Product Spec	
	Dimension (L*H*D)	670*60*275 mm (Leveling feet not included) 670*100*275 mm (Leveling feet included)
	Weight	6 kg
	Adjustable Height	100 to 140 mm
	What's in the box	1. Mounting Base*1 2. Wall Mount Bracket *2 3. Screws 4. QSG
Warrenty	2 Year	
Transportation		
Product Weight	6.09 kg	
Packaging Weight	7.09 kg	
Packaging Dimensions	722 × 312 × 188 mm	

Note: The parameters are for the current version and are subject to change upon final release.

COM Connector Kit



PN	A17E2
SKU	A17E23Z1-93
Product name	COM Connector Kit
Applicability	Anker SOLIX XE AC Anker SOLIX Solarbank Max AC
Product Description	Comprehensive communication terminal kit featuring 16-PIN connection plus dual RJ45 ports. Includes all necessary pins for complete device communication setup and multi-unit coordination.
Product Spec	
What's in the box	<ol style="list-style-type: none"> 1. Terminal Block*1 2. Connector Housing*1 3. Wire Connector Pin*16
Function	<ol style="list-style-type: none"> 1. VPP (Virtual Power Plant) 2. Smart meter (Wired connection) 3. EPO (Emergency Power Off) 4. DRM (Demand Response Modes) 5. SG-Ready Heat Pump 6. 12V Power Supply 7. Whole Home Backup 8. Parallel Connection
Warrenty	1 Year
Transportation	
Product Weight	51.5 g
Packaging Weight	101.5 g
Packaging Dimensions	52.5 × 52.5 × 93 mm

Note: The parameters are for the current version and are subject to change upon final release.